


# Series TC Micro-Towers and Micro-Beacons

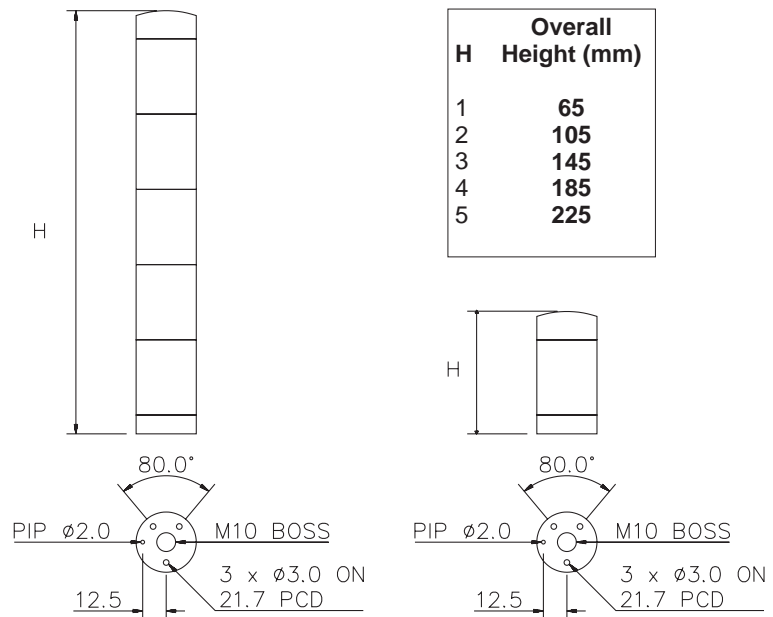

A unique range of IP65 rated Micro Beacon Lamps and Tower Indicators. Unobtrusive yet definitive and incorporating high brilliance LED illumination, these are ideal for industrial, fire, security and automation markets.

The STC/LED range is manufactured either as a single Micro Beacon with point-of-sale choice of 6 lens colours Red, Amber, Green, Blue, Clear or Yellow, or as a 2, 3, 4 or maximum 5-module Tower, each of the towers being supplied with all 6 colour lenses, allowing for customer colour choice and position.

With a diameter of only 32mm, a single Micro Beacon is 65mm high, and a 5-module Tower a compact 225mm high.

Moulded totally in polycarbonate, these Micro devices bring an attractive modern image and high brightness signalling, with minimum overall size to the factory automation, visual indication and machinery building sector.

**Pole-mount:** PM/250/STC  
**Wall Mounting Brackets:** MB12

## STC/LED Micro-Tower Indicators and Micro-Beacons

- Mounting by single M10 hole, with anti-rotation offset spigot (optional use).
- M20 adapter is available which allows easy mounting into conventional conduit entries.
- 230V AC, 115V AC or 24V UC (AC or DC) models.
- Typical LED life in excess of 100,000 hours
- Low maintenance and low power consumption.
- All-polycarbonate IP65 construction.
- Attractive modern image and high brightness signalling.
- Ready-connected cables for installation.

Supply voltage	24Vuc	115Vac	230Vac
Supply voltage limits		± 15%	
Supply current	36mA	18mA	18mA
(Per module)			
Number of LEDs	8 high-intensity LEDs per module		
Temperature limits	-40C, +55C		
IEC protection class	IP65		

**Example Order Code: STC/UC/24/LED/4**

For Installation Accessories please refer to page 73

**D.G. Controls Limited**

Cadley Hill Road, Swadlincote, Derbyshire, DE11 9TB, ENGLAND.

Tel: +44 (0) 1283 550850 Fax: +44 (0) 1283 550776 E-mail: sales@deegee.com www: http://www.deegee.com

Copyright © Reserved